

3-JAW WEDGE TYPE THROUGH-HOLE  
POWER CHUCK (WITH ADAPTOR) (BIG HOLE)

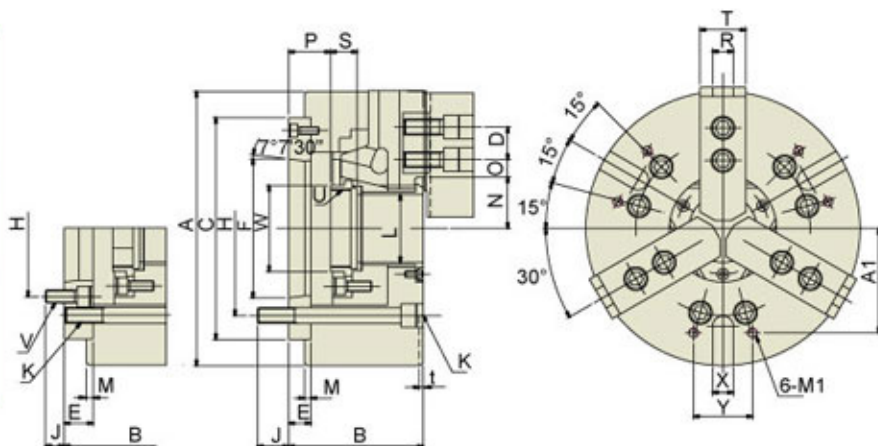


Fig 2

Fig 1

規格 SPECIFICATIONS

尺寸 Dim	型式 Model	TF3C-6A5	TF3C-8A6	TF3X-10A8	TF3X-12A8	TF3X-12A11
通孔徑 Through-Hole (mm)		52	66	78	100	100
柱塞行程 Plunger Stroke (mm)		12	17	19	23	23
爪行程 (直徑) Jaw Stroke (Dia) (mm)		5.5	7.4	8.8	10.6	10.6
最大拉桿推力 Max. Draw Bar Pull Force (kgf)		2200	3400	4300	5500	5500
最大夾持力/油壓壓力 Max. Gripping Force (kgf)/(kgf/cm <sup>2</sup> )		5700	8700	11000	14300	14300
		18	18	27.5	19.5	19.5
最大速度 Max. Speed (r.p.m)		6000	4600	4200	3300	3300
重量 Weight (kg)		14.2	24.5	37.4	61	61
適合油壓缸 Matching Cylinder		RCS-8	RCS-10	RCS-10X	RC15	RC15
適合生爪 Matching Soft Jaw		HC06	HC08	HC10	HC12	HC12
適合硬爪 Matching Hard Jaw		HJ06	HJ08	HJ10	HJ12	HJ12

尺寸表 DIMENSIONS

型式 Model	TF3C-6A5	TF3C-8A6	TF3X-10A8	TF3X-12A8	TF3X-12A11
尺寸 Dim					
A	175	215	254	318	318
B	75	108.5	113	137	126
D	20	25	30	30	30
E	30	22.5	18	33	22
F	82.563	106.36	139.719	139.719	196.8
C(H6)	140	170	220	300	300
H	104.78	133.4	171.45	171.45	235
J	16	16	20	20	20
K	6XM10	6-M12	6XM16	6XM20	6XM20
L	52	66	78	110	110
M	5	7	5	6	6
N max.	32	46	51	68	68
N min.	29.25	42	46.6	63	63
O max.	24	25.5	34.5	53.5	53.5
O min.	7.5	10.5	12	19	19
P max.	25	12.5	26.5	37	26
P min.	12.5	-4.5	7.5	14	3
R	12	14	16	21	21
S	19	25	25	28	28
T	32	37	42	52	52
U max.	M60X2.0	M74XP2.0	M87X2.0	M115X2.0	M115X2.0
V	—	—	—	6XM16	—
W	66	82	96	127	127
X	16	16	16	20	20
Y	36	45	60	60	60
A1	65	80	102	140	140
M1	M8	M8	M10	M10	M10
t	5	5	5	5	5
參考圖 Reference	Fig. 1	Fig. 1	Fig. 1	Fig. 2	Fig. 1