


中空超長行程 油壓夾頭

新產品
NEW

專利產品
Patent Protected



尺寸圖 > Dimensions

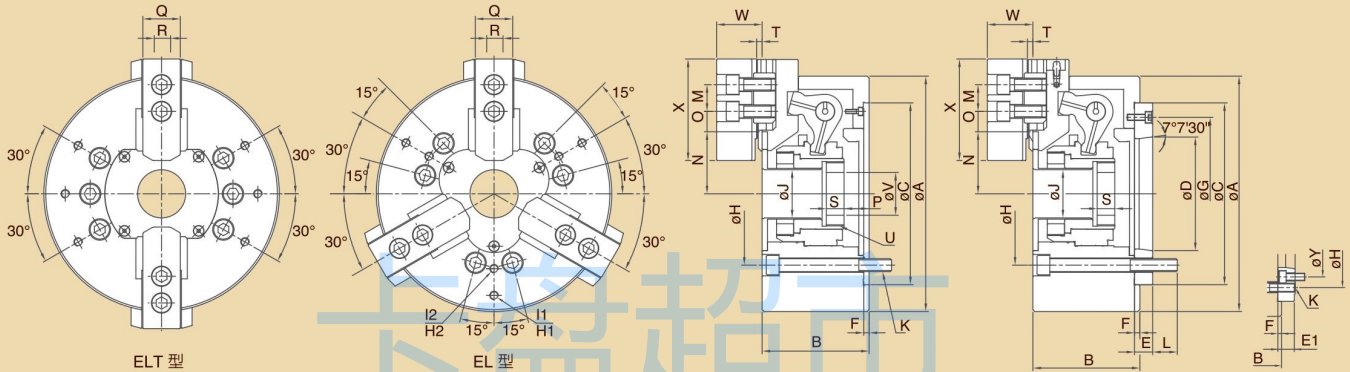

規格表 > Specifications

單位/UNIT:mm

型式/規格 MODEL /SPEC.	主軸鼻端番號 Nose Of Spindle	A	B	C	D	E	E1	F	G	H	I1	H1
EL-06	A2-5	178	87	140	82.563	15	--	5	116	104.8	3-M8x1.25P	PCD ϕ 160
EL-08	A2-6(A2-5)	220	100	170	106.375	17	23	5	150	133.4	3-M8x1.25P	PCD ϕ 190
EL-10	A2-8(A2-6)	265	113	220	139.719	18	28	5	190	171.4	3-M12x1.75P	PCD ϕ 230
ELT-06	A2-5	178	87	140	82.563	15	--	5	116	104.8	6-M8x1.25P	PCD ϕ 145
ELT-08	A2-6(A2-5)	220	100	170	106.375	17	23	5	150	133.4	6-M8x1.25P	PCD ϕ 180
ELT-10	A2-8(A2-6)	265	113	220	139.719	18	28	5	190	171.4	6-M12x1.75P	PCD ϕ 230
型式/規格 MODEL /SPEC.	I2	H2	J	K	L	M	N max.	N min.	O max.	O min.	P max.	
EL-06	3-M8x1.25P	PCD ϕ 120	34	6-M10x1.5P	15.85	20	50.13	38.03	19.55	10.55	15.95	
EL-08	3-M8x1.25P	PCD ϕ 140	42	6-M12x1.75P	18.85	25	61	44.96	20.55	11.55	19.95	
EL-10	3-M12x1.75P	PCD ϕ 180	66	6-M16x2P	21.85	30	78.16	59.37	24.55	11.05	13.45	
ELT-06	--	--	34	6-M10x1.5P	15.85	20	50.13	38.03	19.55	10.55	15.95	
ELT-08	--	--	42	6-M12x1.75P	18.85	25	61	44.96	20.55	11.55	19.95	
ELT-10	--	--	66	6-M16x2P	21.85	30	78.16	59.37	24.55	11.55	13.45	
型式/規格 MODEL /SPEC.	P min.	Q	R	S	T	U	V	W	X	Y	通孔直徑 Thru-Hole [Diameter] (mm)	柱塞行程 Plunger Stroke (mm)
EL-06	0.95	31	12	15	2	M55x2P	20	37.5	73	--	34	15
EL-08	-0.05	35	14	16.5	2	M60x2P	30	39.5	95	104.8	42	20
EL-10	-11.55	40	16	20	2	M85x2P	40	43	110	133.4	66	25
ELT-06	0.95	31	12	15	2	M55x2P	20	37.5	73	--	34	15
ELT-08	-0.05	35	14	16.5	2	M60x2P	30	39.5	95	104.8	42	20
ELT-10	-11.55	40	16	20	2	M85x2P	40	43	110	133.4	66	25
型式/規格 MODEL /SPEC.	爪行程〔直徑〕 Jaw Stroke [Diameter] (mm)	最高迴轉速 Max.Speed r.p.m.(min ⁻¹)	最大拉力 Max. Pull Force kgf (kN)	最大靜夾持力 Max. Gripping Force kgf (kN)	最大設定油壓壓力 Max. Hydr. Pressure kgf/cm ² (MPa)	搭配 油壓缸型號 Matching Cylinder	夾持範圍 Gripping Range					
EL-06	24	3200	2375 (23.2)	2670 (26)	29 (2.8)	P1246	ϕ 25~ ϕ 178					
EL-08	32	2800	3612 (35.4)	3900 (38.2)	28 (2.7)	P1552	ϕ 30~ ϕ 220					
EL-10	37.5	2400	4941 (48.4)	5586 (54.7)	30 (2.9)	P1875	ϕ 45~ ϕ 265					
ELT-06	24	3200	1600 (15.7)	1790 (17.6)	19.5 (1.9)	P1246	ϕ 25~ ϕ 178					
ELT-08	32	2800	2322 (22.7)	2600 (25.5)	18 (1.8)	P1552	ϕ 30~ ϕ 220					
ELT-10	37.5	2400	3294 (32.3)	3724 (36.5)	20 (2.0)	P1875	ϕ 45~ ϕ 265					