


# 歐規 DIN6350 3DAKT 3-JAW POWERFUL ADJUSTMENT STEEL BODY CHUCKS

## 可調式強力型三爪鋼殼夾頭

尺寸圖 » Dimensions

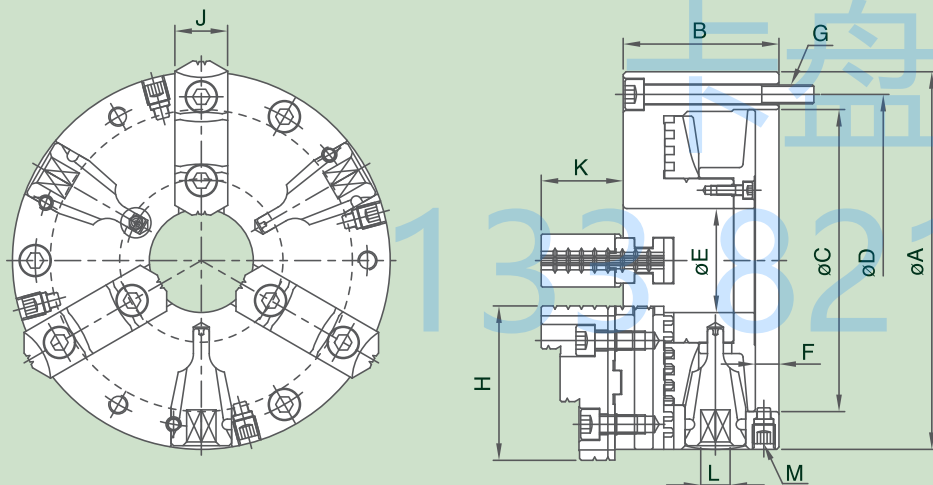

規格表 » Specifications

單位/UNIT:mm

型式/規格 MODEL / SPEC.	A	B	C	D	E	G	F	H	J	K	L	M	最高迴轉速 Max.Speed r.p.m.(min <sup>-1</sup> )	把握範圍 外徑把握 O.D.Clamping	Max. Gripping Diameter 內徑把握 I.D.Clamping
3DAKT-05	125	65	95	108	32	3-M8x1.25P	10.5	57	24	36	8	4-M10x1.5P	4800	$\phi 3$ - $\phi 121$	$\phi 44$ - $\phi 120$
3DAKT-06	160	72.5	125	140	42	3-M10x1.5P	12	68	26	38.5	10	4-M12x1.75P	4200	$\phi 8$ - $\phi 169$	$\phi 50$ - $\phi 158$
3DAKT-08	200	82.5	160	176	55	3-M10x1.5P	12	82	28	43	11	4-M12x1.75P	3500	$\phi 8$ - $\phi 206$	$\phi 58$ - $\phi 191$
3DAKT-10	250	91	200	224	76	3-M12x1.75P	13	102	35	54.5	12	4-M12x1.75P	2600	$\phi 12$ - $\phi 266$	$\phi 77$ - $\phi 250$
3DAKT-12	315	103	260	286	103	3-M16x2P	14	117.5	40	56.5	14	4-M12x1.75P	2200	$\phi 15$ - $\phi 340$	$\phi 85$ - $\phi 313$
3DAKT-15	400	122	330	362	136	3-M16x2P	15	150	50	74.5	17	4-M12x1.75P	1600	$\phi 30$ - $\phi 440$	$\phi 123$ - $\phi 416$